

## Socket with USB Charger Device

1. Model: 51390 / 51390FR / 51390GB / 51390USA
2. Load power: (DE/ FR) 3680W 16A , 230V~50Hz  
(GB) 3120W 13A, 240V~ 50Hz  
(USA) 1800W 15A,120V~ 60Hz
3. Connection: 1\*USB-C, 1\*USB-A
4. Output:  
USB-A: 5V  $\equiv$  3A; 9V  $\equiv$  2A; 12V  $\equiv$  1.5A, 18W  
USB-C: 5V  $\equiv$  3A; 9V  $\equiv$  2.22A; 12V  $\equiv$  1.67A, 20W  
USB-A+USB-C: 5V  $\equiv$  3A, 15W

CE RED



51390



51390FR



51390GB




51390USA

## Wall Socket with USB Charger Device

1. Model: 51405X20 / 51405FRX20
2. Load power: 3680W 16A, 230V~ 50Hz
3. Output:  
Type-C: 5V  $\equiv$  3A; 9V  $\equiv$  2.22A; 12V  $\equiv$  1.67A, MAX 20W  
USB-A: 5V  $\equiv$  3A; 9V  $\equiv$  2A; 12V  $\equiv$  1.5A, MAX 18W  
Type-C + USB-A: 5V  $\equiv$  3A, MAX 15W



CE RED



51405X20



51405FRX20

| TYPE A                                                                              | TYPE B                                                                              | TYPE C                                                                              | TYPE D                                                                              | TYPE E                                                                               | TYPE F                                                                                | TYPE G                                                                                |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| GERMAN                                                                              | FRENCH                                                                              | BRITISH                                                                             | U.S.A                                                                               | SWITZERLAND                                                                          | EUROPE<br>MIDDLE EAST                                                                 | ITALY                                                                                 |

## WiFi Socket with USB Charger Device

1. Model: 51388X20 / 51388FRX20
2. Load power: (DE / FR) 3680W 16A , 230V~50Hz  
(GB) 3120W 13A, 240V~ 50Hz
3. Connections: 1\*USB-C , 1\*USB-A
4. Output:  
USB-C: 5V  $\equiv$  3A; 9V  $\equiv$  2.22A; 12V  $\equiv$  1.67A, 20W  
USB-A: 5V  $\equiv$  3A; 9V  $\equiv$  2A; 12V  $\equiv$  1.5A, 18W  
USB-A+USB-C: 5V  $\equiv$  3.1A, 15.5W
5. Network support: IEEE802.11b/g/n
6. Tuya Smart / Matter / Voice control



51388X20



51388FRX20

**CE RED**

## WiFi Socket with USB Charger Device

1. Model: 51388X33 / 51388FRX33
2. Load power: (DE / FR) 3680W 16A , 230V~50Hz  
(GB) 3120W 13A, 240V~ 50Hz
3. Connections: 1\*USB-C , 1\*USB-A
4. Output:  
USB-C: 5V  $\equiv$  3A; 9V  $\equiv$  3A; 12V  $\equiv$  2.5A; 15V  $\equiv$  2A; 20V  $\equiv$  1.5A, 30W  
PPS: 3.3V-11V  $\equiv$  3A, 3.3V-16V  $\equiv$  2A, 33W  
USB-A: 5V  $\equiv$  3A; 9V  $\equiv$  3A; 12V  $\equiv$  2.5A; 15V  $\equiv$  2A; 20V  $\equiv$  1.5, 30W  
USB-A+USB-C: 5V  $\equiv$  3.6A, 18W
5. Network support: IEEE802.11b/g/n
6. Tuya Smart / Matter / Voice control



51388X33



51388FRX33

**CE RED**

| TYPE A | TYPE B | TYPE C  | TYPE D | TYPE E      | TYPE F                | TYPE G |
|--------|--------|---------|--------|-------------|-----------------------|--------|
|        |        |         |        |             |                       |        |
| GERMAN | FRENCH | BRITISH | U.S.A  | SWITZERLAND | EUROPE<br>MIDDLE EAST | ITALY  |



2.4GHz Only



App Control



Voice Control



Group Control



Timer Function



Countdown



Family Sharing



Away Mode

## DC / AC Wireless Doorbell

1. 98175(DC): 2X1.5V AA  
98176(AC): 120V , 230V , 240V  
90022: CR2032 3V
2. Range up to(open air): 150m
3. Ringtones: 36
4. Volume: 3 Levels
5. Transmitter waterproof level: IP44
6. Frequency: 433.92MHz



98175  
DC(battery)



98176  
AC(plug in)



Optional color



90022

CE RED

## DC / AC Wireless Doorbell

1. 98410(DC): 2X1.5V AA  
98411(AC): 120V , 230V , 240V  
90022: CR2032 3V
2. Range up to(open air): 150m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP44
6. With LED Flashing Signal
7. Frequency: 433.92MHz



98410  
DC(battery)



98411  
AC(plug in)



Optional color



90022

CE RED UK CA Intertek FC

### Battery Transmitter(CR2032)



90086  
IP44

90022  
IP44

90062  
IP44

W96001  
IP44

90094  
IP55

90095  
IP55

### Kinetic Transmitter



90082  
IP44

90096  
IP55

90110  
IP55



Long Range



Energy Saving



Ringtones



Volume Control



IP44

## DC / AC Wireless Doorbell

1. 98395(DC): 3X1.5V AA  
98396(AC): 120V , 230V , 240V  
90062: CR2032 3V
2. Range up to(open air): 150m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP44
6. Frequency: 433.92MHz



98395  
DC(battery)



98396  
AC(plug in)



90062

Optional color:



## DC / AC Wireless Doorbell

1. 98441(DC): 3X1.5V AA  
98442(AC): 120V , 230V , 240V  
90062: CR2032 3V
2. Range up to(open air): 300m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP44
6. With LED Flashing Signal
7. Frequency: 433.92MHz



98441  
DC(battery)



98442  
AC(plug in)



90062

Optional color:



Long Range



Energy Saving



Ringtones



Volume Control



IP44

## DC Wireless Doorbell

1. 98406(DC): 3X1.5V AA  
90062: CR2032 3V
2. Range up to(open air): 200m
3. Ringtones: 38
4. Volume: 4 Levels
5. Transmitter waterproof level: IP44
6. With LED Flashing Signal
7. Frequency: 433.92MHz



98406  
DC(battery)



90062

## DC / AC Wireless Doorbell

1. 98413(DC): 3X1.5V AA  
98414(AC): 120V , 230V , 240V  
90094: CR2032 3V
2. Range up to(open air): 200m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP55
6. With LED Flashing Signal
7. Frequency: 433.92MHz



98413  
DC(battery)



98414  
AC(plug in)



90094



Long Range



Energy Saving



Ringtones



Volume Control



IP44

## DC / AC Wireless Doorbell

1. 98464(DC): 3X1.5V AA  
98465(AC): 120V , 230V , 240V  
90094: CR2032 3V
2. Range up to(open air): 300m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP55
6. With LED Flashing Signal
7. Frequency: 433.92MHz



98464  
DC(battery)



98465  
AC(plug in)



90094

## DC / AC Wireless Doorbell

1. 98433(DC): 3X1.5V AA  
98434(AC): 120V , 230V , 240V  
90094: CR2032 3V
2. 98434(AC): Night light design
3. Range up to(open air): 200m
4. Ringtones: 36
5. Volume: 4 Levels
6. Transmitter waterproof level: IP55
7. With LED Flashing Signal
8. Frequency: 433.92MHz



98433  
DC(battery)



98434  
AC(plug in)



90094



Long Range



Energy Saving



Ringtones




Volume Control



IP55


## Kinetic Wireless Doorbell

1. 98431(AC): 120V , 230V , 240V  
90110: Self-powered
2. Downward lighting angle design
3. Auto sensor night lighting, Soft white 2700K
4. Range up to(open air): 150m
5. Ringtones: 36
6. Volume: 4 Levels
7. Transmitter waterproof level: IP55
8. With LED Flashing Signal
9. Frequency: 433.92MHz

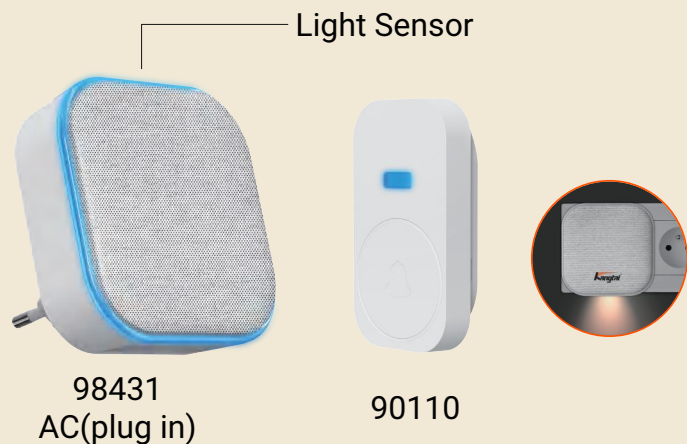


## Kinetic Wireless Doorbell

1. 98435(AC): 120V , 230V , 240V  
90096: Self-powered
2. Downward lighting angle design
3. Auto sensor night lighting, Soft white 2700K
4. Range up to(open air): 150m
5. Ringtones: 36
6. Volume: 4 Levels
7. Transmitter waterproof level: IP55
8. With LED Flashing Signal
9. Frequency: 433.92MHz

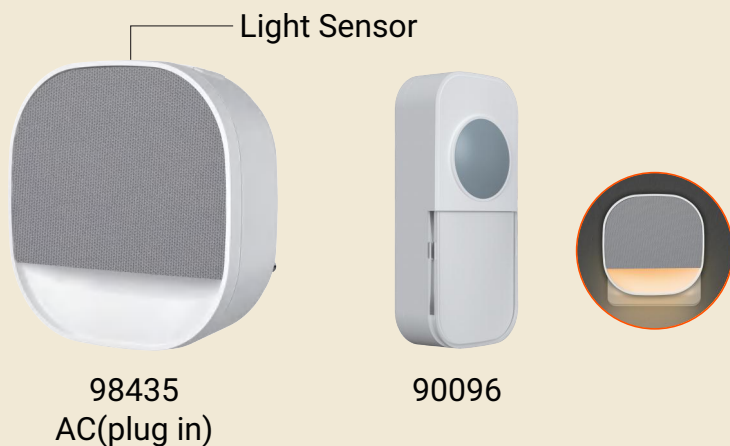

## Kinetic Wireless Doorbell

1. 98275(AC): 120V , 230V , 240V  
90082: Self-powered
2. Range up to(open air): 150m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP44
6. With LED Flashing Signal
7. Frequency: 433.92MHz

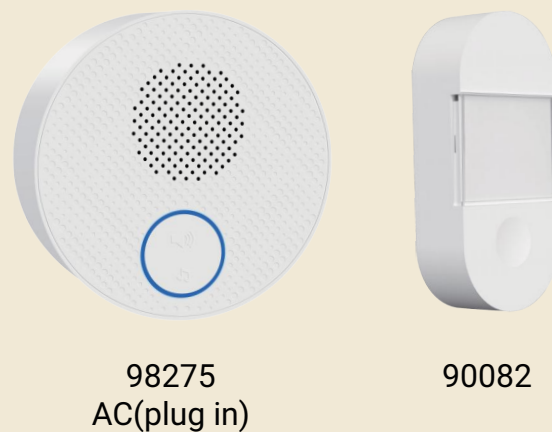

Long Range



Energy Saving



Ringtones



Volume Control



IP55

## Bamboo Wireless Doorbell

1. 98599(DC): 3X1.5V AA  
98600(AC): 120V , 230V , 240V  
90062: CR2032 3V
2. Range up to(open air): 300m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP44
6. With LED Flashing Signal
7. Frequency: 433.92MHz
8. Bamboo cover

CE RED



98599  
DC(battery)



98600  
AC(plug in)



90062

## GRS Wireless Doorbell

1. 98439(DC): 3X1.5V AA  
98440(AC): 120V , 230V , 240V  
90094: CR2032 3V
2. Range up to(open air): 200m
3. Ringtones: 36
4. Volume: 4 Levels
5. Transmitter waterproof level: IP55
6. With RGB Flashing Signal
7. Frequency: 433.92MHz
8. Sustainable, Recycled Plastic


CE RED UK CA



98439  
DC(battery)



98440EU  
AC(plug in)



90094



Long Range



Energy Saving



Ringtones



Volume Control



IP44

## Wireless Doorbell With USB Charger

1. 98532

1\*USB-A , 1\*USB-C

Power supply: 3680W , 16A

In put: 120V , 230V , 240V

Out put:

USB-A: 5V  $\Rightarrow$  3A; 9V  $\Rightarrow$  2A; 12V  $\Rightarrow$  1.5A, 18W

USB-C: 5V  $\Rightarrow$  3A; 9V  $\Rightarrow$  2.22A; 12V  $\Rightarrow$  1.67A, 20W

USB-A+USB-C: 5V  $\Rightarrow$  3A, 15W

90094: CR2032 3V

2. Range up to(open air): 200m

3. Ringtones: 36

4. Volume: 4 Levels


5. Transmitter waterproof level: IP55

6. With LED Flashing Signal

7. Frequency: 433.92MHz



98532

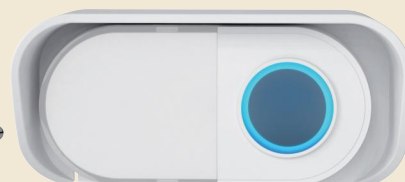

90094

CE RED

## Wireless Doorbell With USB Charger

1. 98535

1\*USB-A , 1\*USB-C

In put: 120V , 230V , 240V

Out put:

USB-A: 5V  $\Rightarrow$  3A; 9V  $\Rightarrow$  2A; 12V  $\Rightarrow$  1.5A, 18W

USB-C: 5V  $\Rightarrow$  3A; 9V  $\Rightarrow$  2.22A; 12V  $\Rightarrow$  1.67A, 20W

USB-A+USB-C: 5V  $\Rightarrow$  3A, 15W

90094: CR2032 3V

2. Range up to(open air): 200m

3. Ringtones: 36

4. Volume: 4 Levels


5. Transmitter waterproof level: IP55

6. With LED Flashing Signal

7. Frequency: 433.92MHz



98535

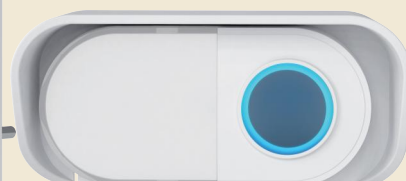

90094

CE RED

| TYPE A | TYPE B | TYPE C  | TYPE D | TYPE E      | TYPE F                 | TYPE G |
|--------|--------|---------|--------|-------------|------------------------|--------|
|        |        |         |        |             |                        |        |
| GERMAN | FRENCH | BRITISH | U.S.A  | SWITZERLAND | EOUROPE<br>MIDDLE EAST | ITALY  |



Long Range



Energy Saving



Ringtones



Volume Control



IP55

## Wired Doorbell

1. 98525 Power supply:  
4X1.5AA 6VDC or 8-12V~
2. Ding Dong



98525



90099

## Wired Doorbell

1. 98526 Power supply:  
4X1.5 AA, 6VDC ; 8-12V~ ;  
220-240V~ 50Hz / 120V~ 60Hz
2. Ding Dong



98526



90099

Illuminated push button



90099




90089



90102



51377



Wired




Batteries



Melody



1 Level



Transformer or  
Battery Needed

## Wired Doorbell

1. 98537 Chime power source:  
4X1.5VAA DC (excluded); AC 220~240V
2. Melody: 36
3. Volume control
4. Color: White
5. Maximum sound level at 1M(in dB) 75
6. Transmitter waterproof level: IP44




98537



90089

## Electric Bell

1. 98540 Voltage: AC 12V
2. Volume: 90 dB
3. Coil: Double pure copper coil

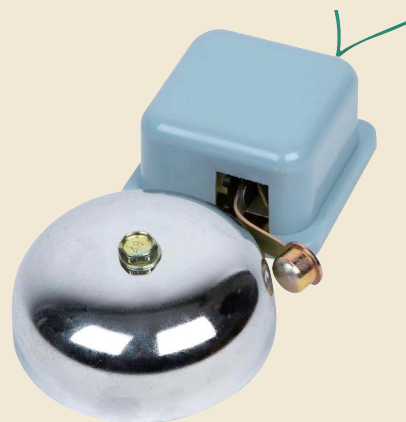

98540

## Electric Bell

1. 98615 Voltage: AC 12V or 220V
2. Volume: 90 dB
3. Size: 75mm
4. Coil: Double pure copper coil



98615

## Electric Bell

1. 98617 Voltage: AC 12V or 220V
2. Volume: 95 dB
3. Coil: Double pure copper coil



98617



Wired




Batteries



Melody



1 Level



Transformer or  
Battery Needed

## All-Weather Water-Resistant Tester No.6877-18

AC voltage test-contact, 70 to 250VAC  
AC voltage test-non-contact 70 to 600VAC  
DC voltage test up to 250VDC  
Polarity test, 3V to 36VDC  
Continuity check, 0 to 50M ohm  
Self-test: Extra-safe  
Magnetic screwdriver tip  
Water-resistant; Durable  
P.C.Housing



## MultiFunction Electrical Electronic Tester No.6885-48

AC voltage test-contact, 70 to 250VAC  
AC voltage test-non-contact 70 to 1000VAC  
DC voltage test, loop contact 1.5 to 36VDC  
DC voltage test, direct contact 70 to 250VDC  
Polarity check 3 to 36VDC  
Continuity check, 0 to 100M ohm  
High-low sensitivity switch;  
LED and buzzer indication  
Compact, handy;  
Adjustable sense arm  
Battery test; Self-test  
Detects negative ions



## High Sensitivity Circuit Tester No.6889-68B

Non-contact Test  
AC voltage test range: 200 to 600VAC  
by direct contact method  
Self-test  
Continuity test  
Used to detect microwave leakage



## Digital Voltage Tester No.6878-28B

AC/DC voltage test range: 12,36,55,110 to 220V  
LCD display for double safety  
No batteries needed  
Continuity check



## Digital Voltage Tester No.6878-28D

AC/DC voltage test range: 12,36,55,110 to 220V  
Neon lamp & LCD display for double safety  
No batteries needed  
Continuity check  
Voltage Meas: 50-500Hz  
Patented



## Digital Voltage Tester No.6878-28C

AC/DC voltage test range: 12,36,55,110 to 220V  
LCD display for double safety  
No batteries needed  
Continuity check



## Voltage Tester No.6875-17150

ø3.5 × 140mm  
Test Range: 100-250VAC



## Voltage Tester No.6875-304A

ø3.5 × 190mm  
Test Range: 100-250VAC



## Voltage Tester No.6875-201C

ø3 × 140mm  
Test Range: 100-250VAC  
Patented



## Voltage Tester No.6875-304C

ø3.5 × 190mm  
Test Range: 100-250VAC  
Patented



## Voltage Tester No.6875-2 in 1

ø3 × 140mm  
ø3.5 × 190mm  
Test Range: 100-250VAC




## Voltage Tester No.689011

Function Introduction: The voltage tester can test the polarity of the DC power and the voltage of AC power, and identify the (live) phase of AC power. The test range of the AC voltage will be 110-230-400V, 0-60Hz.  
Function Description: polarity detection of DC voltage, detection of AC voltage, phase detection of AC power.  
Voltage Test: 110-400VAC  
Not for sale in Eastern Europe countries



## Voltage Tester No.689012

Function Introduction: The voltage tester can test the polarity of the DC power and the voltage of AC power, and identify the (live) phase of AC power. The test range of the voltage will be 12-24-50-120-230-400-690V, 0-60Hz.  
Function Description: polarity detection of DC voltage, detection of AC voltage, phase detection of AC power.  
Voltage Test: 12-690VAC  
Not for sale in Eastern Europe countries



## Voltage Tester No. 6890-62(3 in 1)

Rated Voltage Range: 120-500V  
Voltage display:  
110-220-380VAC 150-300-500VDC  
Voltage Meas: 50-500Hz  
Input current: Is<52mA at 400VAC



## Voltage Tester No.6890-63(8 in 1)

Rated Voltage Range: 6-400V  
Type of display: 6-12-24-50-110-220-380V LED  
Input current: Is<52mA at 380VAC  
Polarity display: visual(+)(-)  
Voltage Meas: 50-500Hz



# 康泰电气有限公司

KANGTAI ELECTRIC CO.,LTD

地址:浙江省乐清市黄华工业区康泰路5号 邮编: 325605

Add: No.5 kangtai Road, HuangHua Industrial District,

Yueqing, Wenzhou, Zhejiang, China 325605

Tel:0086-577-62658100,62658102

Fax:0086-577-62652348, 62657118

Home Page: <http://www.kangtai.com.cn>

E-mail:[cyhk@kangtai.com.cn](mailto:cyhk@kangtai.com.cn)

## ALL RIGHTS RESERVED

For modification of products subjects to continuous betterment in the development and test of kangtai system products, no notice will be given separately